



// PROMOTION

VALID UNTIL 31.12.2024

WM CRIMPING PLIERS



SICHER SEIT 1827.

# WM crimping pliers

for “standard design” tubular cable lugs and connectors



•



WM crimping



Hexagonal crimping

**WM crimping insert**

provides additional compression in comparison with the classic hexagonal profile, thus ensuring improved contact between conductors and connectors

•

**Rotatable profile discs**

with precise cross-section allocation

•

**Stamped cross section**

for better checks



•

**Less manual force**

enables working without tiring

# ↳ WM crimping

for compressed, multi-stranded or thinned-out, fine-stranded conductors

Item no.  
10 1890  
€199.00



**NEW**

**Crimping range: 6 – 50 mm<sup>2</sup>**  
↳ **WM crimping pliers**

- Crimping range: 6 – 50 mm<sup>2</sup>
- Length: 387 mm
- Weight: 1,410 g

Item no.  
10 1891  
€249.00



**NEW**

**Crimping range: 10 – 120 mm<sup>2</sup>**  
↳ **WM crimping pliers**

- Crimping range: 10 – 120 mm<sup>2</sup>
- Length: 652 mm
- Weight: 2,910 g

Item no.  
18 1548  
€339.00



**AS A SET**

**Includes 255 tubular cable lugs**  
↳ **Tubular cable lug set, WM**

Consisting of:

- Crimping pliers 6 – 50 mm<sup>2</sup>, WM profile
- “Standard design” tubular cable lugs
  - 20 of each: 35 mm<sup>2</sup> M8 – M10, 50 mm<sup>2</sup> M10 – M12
  - 25 of each: 6 mm<sup>2</sup> M6 – M8, 10 mm<sup>2</sup> M6 – M8, 16 mm<sup>2</sup> M8 – M10, 25 mm<sup>2</sup> M8 – M10
- high-quality box



## Compatible with:

### Tubular cable lugs, standard design

Item no.	Cross section	Bore
18 0692	6 mm <sup>2</sup>	M 5
18 0694	6 mm <sup>2</sup>	M 6
18 0696	6 mm <sup>2</sup>	M 8
18 0697	6 mm <sup>2</sup>	M 10
18 0698	6 mm <sup>2</sup>	M 12
18 0700	10 mm <sup>2</sup>	M 5
18 0702	10 mm <sup>2</sup>	M 6
18 0704	10 mm <sup>2</sup>	M 8
18 0705	10 mm <sup>2</sup>	M 10
18 0706	10 mm <sup>2</sup>	M 12
18 0709	16 mm <sup>2</sup>	M 5
18 0710	16 mm <sup>2</sup>	M 6
18 0712	16 mm <sup>2</sup>	M 8
18 0714	16 mm <sup>2</sup>	M 10
18 0715	16 mm <sup>2</sup>	M 12
18 0718	25 mm <sup>2</sup>	M 5
18 0720	25 mm <sup>2</sup>	M 6
18 0722	25 mm <sup>2</sup>	M 8
18 0724	25 mm <sup>2</sup>	M 10
18 0725	25 mm <sup>2</sup>	M 12
18 0726	25 mm <sup>2</sup>	M 14
18 0730	35 mm <sup>2</sup>	M 6
18 0732	35 mm <sup>2</sup>	M 8
18 0734	35 mm <sup>2</sup>	M 10
18 0735	35 mm <sup>2</sup>	M 12
18 0736	35 mm <sup>2</sup>	M 14
18 0737	35 mm <sup>2</sup>	M 16
18 0739	50 mm <sup>2</sup>	M 6
18 0740	50 mm <sup>2</sup>	M 8
18 0742	50 mm <sup>2</sup>	M 10
18 0744	50 mm <sup>2</sup>	M 12
18 0745	50 mm <sup>2</sup>	M 14
18 0746	50 mm <sup>2</sup>	M 16
18 0747	50 mm <sup>2</sup>	M 20
18 0749	70 mm <sup>2</sup>	M 6
18 0750	70 mm <sup>2</sup>	M 8
18 0752	70 mm <sup>2</sup>	M 10
18 0754	70 mm <sup>2</sup>	M 12
18 0755	70 mm <sup>2</sup>	M 14
18 0756	70 mm <sup>2</sup>	M 16
18 0758	70 mm <sup>2</sup>	M 20
18 0759	95 mm <sup>2</sup>	M 8
18 0760	95 mm <sup>2</sup>	M 10
18 0762	95 mm <sup>2</sup>	M 12
18 0763	95 mm <sup>2</sup>	M 14
18 0764	95 mm <sup>2</sup>	M 16
18 0766	95 mm <sup>2</sup>	M 20
18 0768	120 mm <sup>2</sup>	M 8
18 0770	120 mm <sup>2</sup>	M 10
18 0772	120 mm <sup>2</sup>	M 12
18 0773	120 mm <sup>2</sup>	M 14
18 0774	120 mm <sup>2</sup>	M 16
18 0776	120 mm <sup>2</sup>	M 20

### Butt connector, standard design


Item no.	Cross section	Length
18 0908	6 mm <sup>2</sup>	24 mm
18 0910	10 mm <sup>2</sup>	30 mm
18 0912	16 mm <sup>2</sup>	30 mm
18 0914	25 mm <sup>2</sup>	38 mm
18 0916	35 mm <sup>2</sup>	42 mm
18 0918	50 mm <sup>2</sup>	48 mm
18 0920	70 mm <sup>2</sup>	52 mm
18 0922	95 mm <sup>2</sup>	58 mm
18 0924	120 mm <sup>2</sup>	62 mm

### Tubular cable lug for switching device connections

Item no.	Cross section	Bore
18 3798	25 mm <sup>2</sup>	M 6
18 3800	35 mm <sup>2</sup>	M 6
18 3801	35 mm <sup>2</sup>	M 8
18 3802	50 mm <sup>2</sup>	M 6
18 3804	50 mm <sup>2</sup>	M 8
18 3806	50 mm <sup>2</sup>	M 10
18 3808	70 mm <sup>2</sup>	M 6
18 3810	70 mm <sup>2</sup>	M 8
18 3812	70 mm <sup>2</sup>	M 10
18 3814	70 mm <sup>2</sup>	M 12
18 3815	95 mm <sup>2</sup>	M 6
18 3816	95 mm <sup>2</sup>	M 8
18 3818	95 mm <sup>2</sup>	M 10
18 3820	95 mm <sup>2</sup>	M 12
18 3821	120 mm <sup>2</sup>	M 6
18 3822	120 mm <sup>2</sup>	M 8
18 3824	120 mm <sup>2</sup>	M 10
18 3826	120 mm <sup>2</sup>	M 12

#### SUITABLE FOR:

Cable class 2, 5 and 6 in accordance with IEC 60228

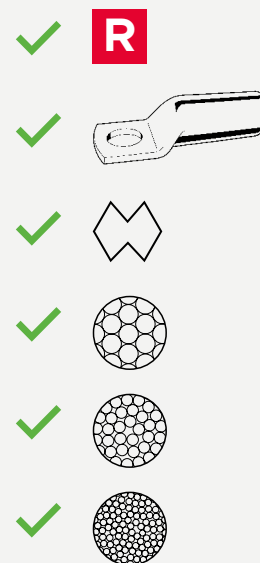

Technical modifications, colour deviations, errors and misprints reserved.  
Offer only valid while stocks last. Sale only via specialist wholesalers.